

LI-ION RECHARGEABLE

XPR-5582

INTEGRITAS™ INTRINSICALLY SAFE LANTERN

NIGHTSTICK®
Life Depends on Light™



1750

**POWERFUL
LUMENS**

INCLUDING HIGH & LOW

180° DOWNWARD ROTATION



Rear green safety lights
provide visibility in smoke filled applications



Carry strap with seat belt style buckle
for additional hands-free use



Convenient locking snap-in charger
included



Dustproof/Waterproof (IP-67) and chemical/heat resistant for any environment

FL 1 STANDARD	HIGH	LOW
	1750 LUMENS	600 LUMENS
	5h	11h
	552m	325m
	81250cd	27083cd
	2m	1m

MULTIPLE COLORS TO COME



1750 LUMENS

1-800-233-2155 • 1-469-326-9400 • nightstick.com

© 2018 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates.

INTEGRITAS™

LANTERN

LI-ION RECHARGEABLE**ITEM NUMBER/UPC**

XPR-5582RX, UPC# 0 17398 806824

MARKET APPLICATIONS

Hazardous work environments, fire, rescue, industrial and automotive

CERTIFICATIONS

- cETLus, CE, Meets requirements of NFPA-1971-8.6 (2013), Charger meets requirements of NFPA-1901 (2009) Mounted in any Position

CASE MATERIAL

- Glass filled nylon polymer

LUMENS/RUNTIME**FLASHLIGHT**

- HIGH: 1750L, 5 hrs. runtime
- LOW: 600L, 11 hrs. runtime

CANDELA**FLASHLIGHT**

- HIGH: 81,250
- LOW: 27,083

BEAM DISTANCE**FLASHLIGHT**

- HIGH: 552m
- LOW: 325m

WATER RATING

- IP-67 (dustproof and waterproof)

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 7.54 in / 19.2 cm
- WIDTH: 4.26 in / 10.8 cm
- DEPTH: 5.83 in / 14.8 cm
- WEIGHT: 2 lbs. 11 oz. / 1219 g

BATTERY

- Rechargeable Li-ion battery pack

WARRANTY


- Limited lifetime warranty

WHAT'S INCLUDED

- Lantern
- Li-ion rechargeable battery pack
- Locking snap-in charger (5582-CHGR1)
- AC & DC power supply
- Removable shoulder strap
- Instruction manual

FL1 STANDARD	HIGH	LOW
	1750 LUMENS	600 LUMENS
	5h	11h
	552m	325m
	81250cd	27083cd

XPR-5582 PERFORMANCE CURVE

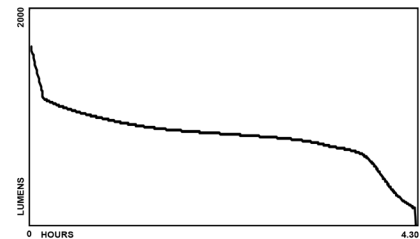

Bayco Products, Inc. XPR-5582
 640 S. Sanden Blvd., Wylie, TX 75098

ID 4003544
 INTRINSICALLY SAFE
 SECURITE INTRINSEQUE

CLASS I DIV 2 GRPS A-D T3
 CLASS II & III DIV 2 GRPS F-G T135°C
 CLASS I ZONE 2 Group IIC T3
 -20°C ≤ Tamb ≤ +40°C
 3.7V/Cell 5582-BATT



WARNING: Risk of ignition - Do not open in a hazardous area.
 AVERTISSEMENT: Ne pas ouvrir dans une zone dangereuse.
 WARNING: Risk of ignition - Do not charge batteries in a hazardous area.
 AVERTISSEMENT: Danger d'inflammation - Ne pas charger les piles dans une zone dangereuse.

CERTIFIED



MULTIPLE COLORS TO COME